

8 Ashlegan St., Kiryat Gat 82021 Israel  
Tel: +972 8 681 8899 Fax: +972 8 681 8801  
www.mv-technology.com | info@mv-technology.com

# MV-MA

Supper dry multi jet water meter with output



## Characteristic

- Magnetic coupling
- Super dry register
- Robust and solid design for long term operation
- Working temperature 50°C
- Pressure rating PN10
- pulse output per 1L, 10L or 100L

## Optional

- internal non-return valve

8 Ashlegan St., Kiryat Gat 82021 Israel  
 Tel: +972 8 681 8899 Fax: +972 8 681 8801  
[www.mv-technology.com](http://www.mv-technology.com) | [info@mv-technology.com](mailto:info@mv-technology.com)


### Metrological performances

Qn			2.5	5
DN			20	25
Q <sub>max</sub>	Maximum flow	m <sup>3</sup> /h	5.0	10
Q <sub>n</sub>	Permanent flow	m <sup>3</sup> /h	2.5	5.0
Q <sub>t</sub>	Transitional flow	m <sup>3</sup> /h	0.200	0.400
Q <sub>min</sub>	Minimum flow	m <sup>3</sup> /h	0.050	0.100

### Dimensions

DN		20	25
Length	mm	190	260
Connection	BSP	G 1 B	G 1¼ B
Width	mm	95	105
Height	mm	125	123
Weight	Kg	1.6	2.6

### Pressure Loss Curve

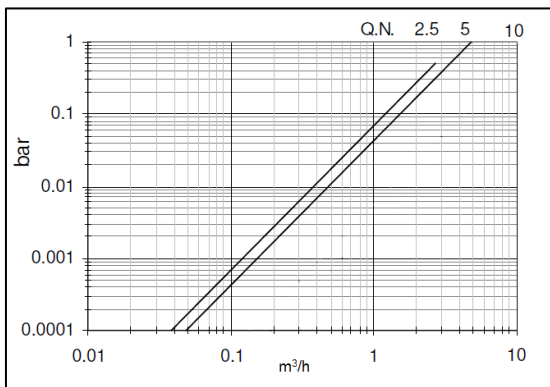

### Error Curve

